



REVISION			
NO	DATE	CHANGE	APPROVED
1	4-1-84	RS1 REISSUED RS5, 56 VALUES CHANGED VR8, 7 ADDED R42 VALUE CHANGED C8 CHANGED	

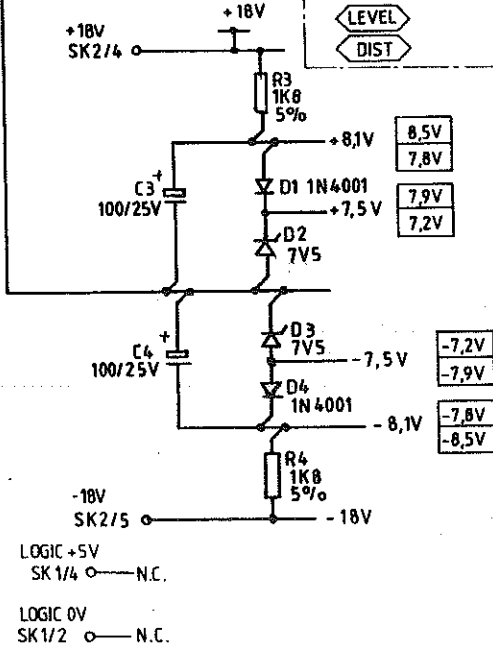

D5 TO D8= 1N4148

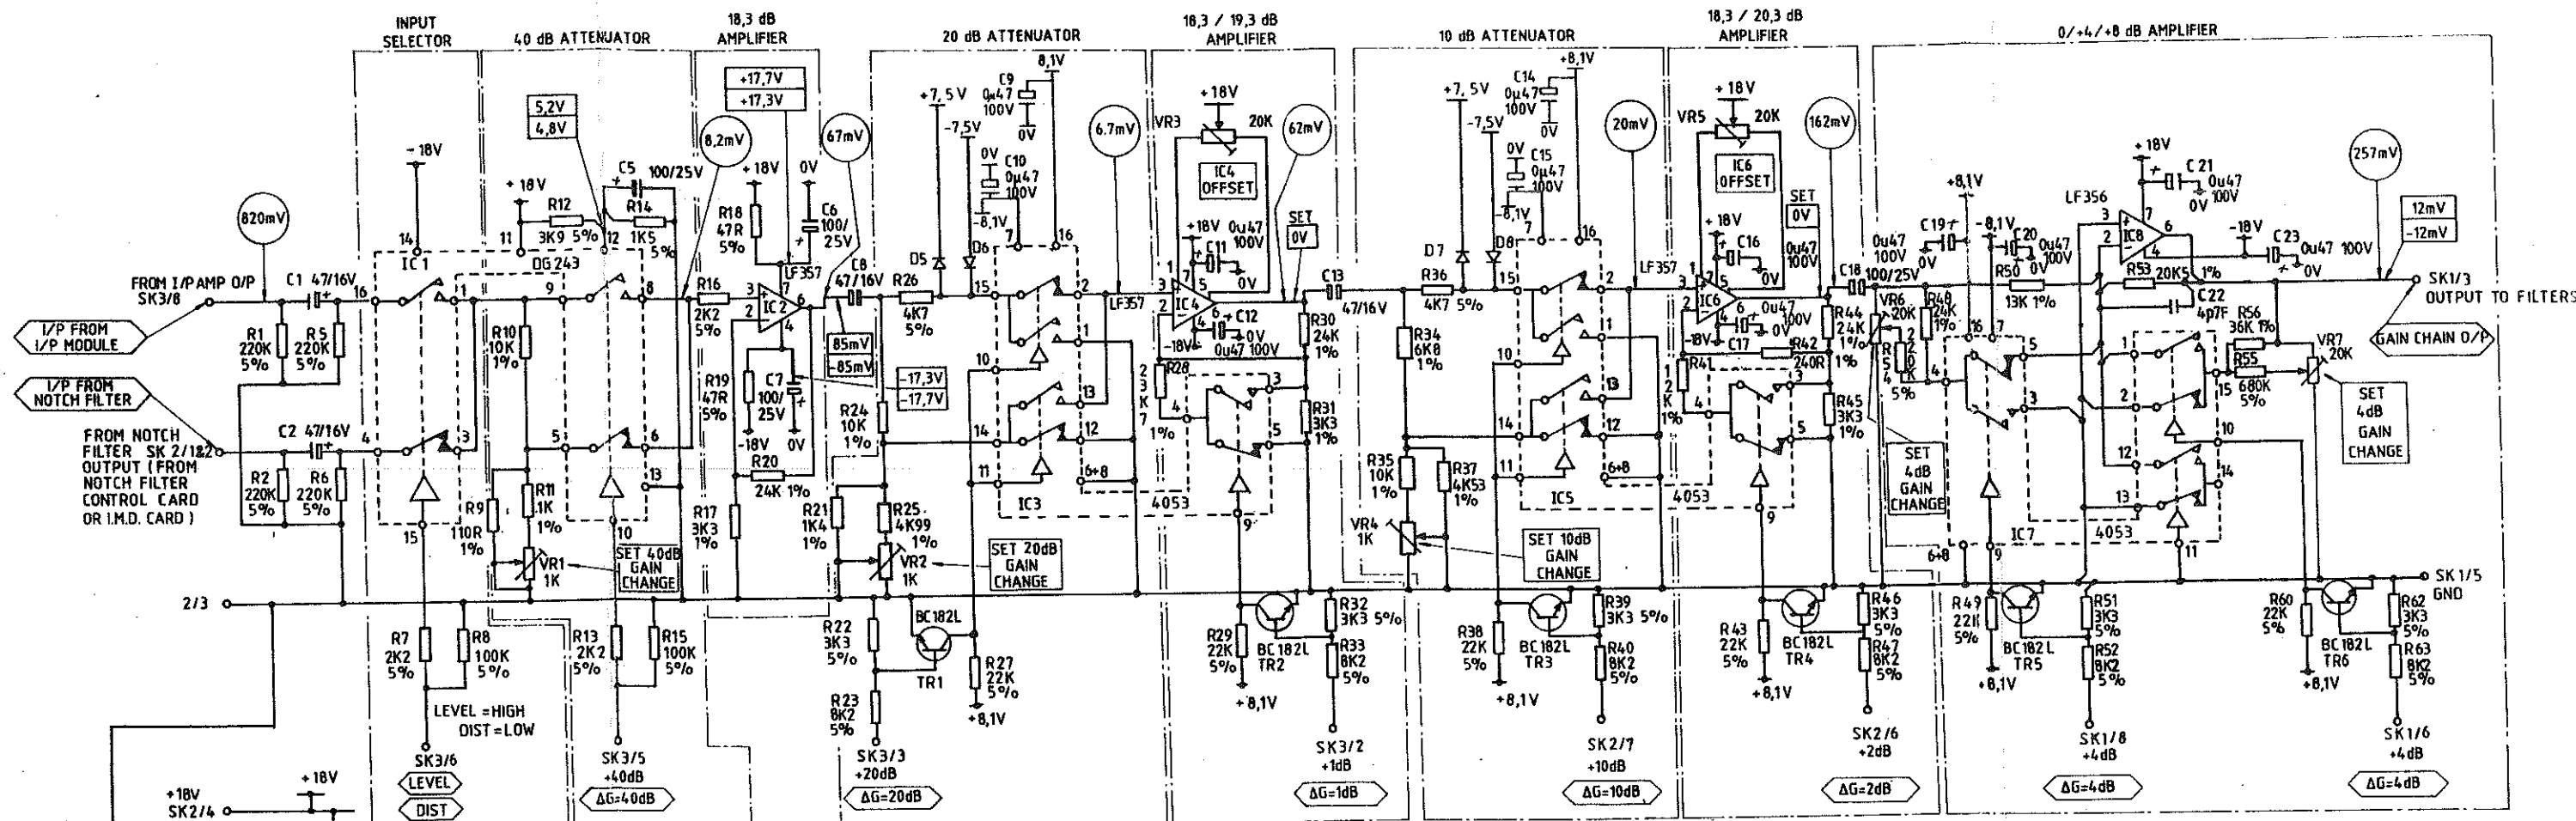


REPRESENTS A.C. VOLTAGES MEASURED WITH AN INPUT IMPEDANCE OF 10K OHMS OR GREATER. UNLESS OTHERWISE SPECIFIED THESE LEVELS CORRESPOND TO A 1KHz TONE AT A REFERENCE LEVEL OF 0dBu (0.775V) INTO A FULLY CALIBRATED TEST SET, LEVEL FUNCTION, 0dB RANGE.



REPRESENTS D.C. VOLTAGES MEASURED WITH A VOLTMETER OF 20,000Ω/V OR GREATER. MAXIMUM IS DEFINED AS THE MOST POSITIVE VOLTAGE.

USE EXTENDER CARD PCB 75033



EXTENDER TEST POINT OR INDICATOR REFERENCE

HIGHEST	MISSING
R63	RS7,58,59,61
C23	-
VR7	-
TR6	-
D8	-
IC8	-

NEUTRIK AG Unit 2 Samuel Whites Industrial Estate, Medine Road, Cowes, Isle of Wight, PO31 7LP. GB Tel: (0983) 299959 Telefax: (0983) 290142		TITLE	
		GAIN CHAIN	
TOLERANCES - UNLESS OTHERWISE STATED Linear Millimetres ±0.4mm Angular Degrees ±0.25°		USE MJS401D, TP401, TT402	
MATERIAL	ORIGINAL SCALE	DRAWING NO	
DATE 10/3/83	DRAWN D. CHEN	PROJECT NO TYPE SHEET NO SIZE	
CHECKED	DATE	750	C 076 1